



CHAIN ELEVATOR



USE

The function of the chain elevator is to convey high temperature products.

OPERATION

The product enters by gravity into the elevator foot nib; a chain with buckets collects the product that is raised upwards and unloads the product with the head turn.


MANUFACTURING

- Metal sheet framework support, with galvanised metal sheet sections
- Hemmed edge metal sheet piping, bolted among the various elements that make it up.
- Special steel chain and buckets.
- Direct-chain drive.



DETAILS

- 01) Foot load
- 02) Discharge head
- 03) Overpressure panel (Optional)
- 04) Bore hoist
- 05) Chain detail

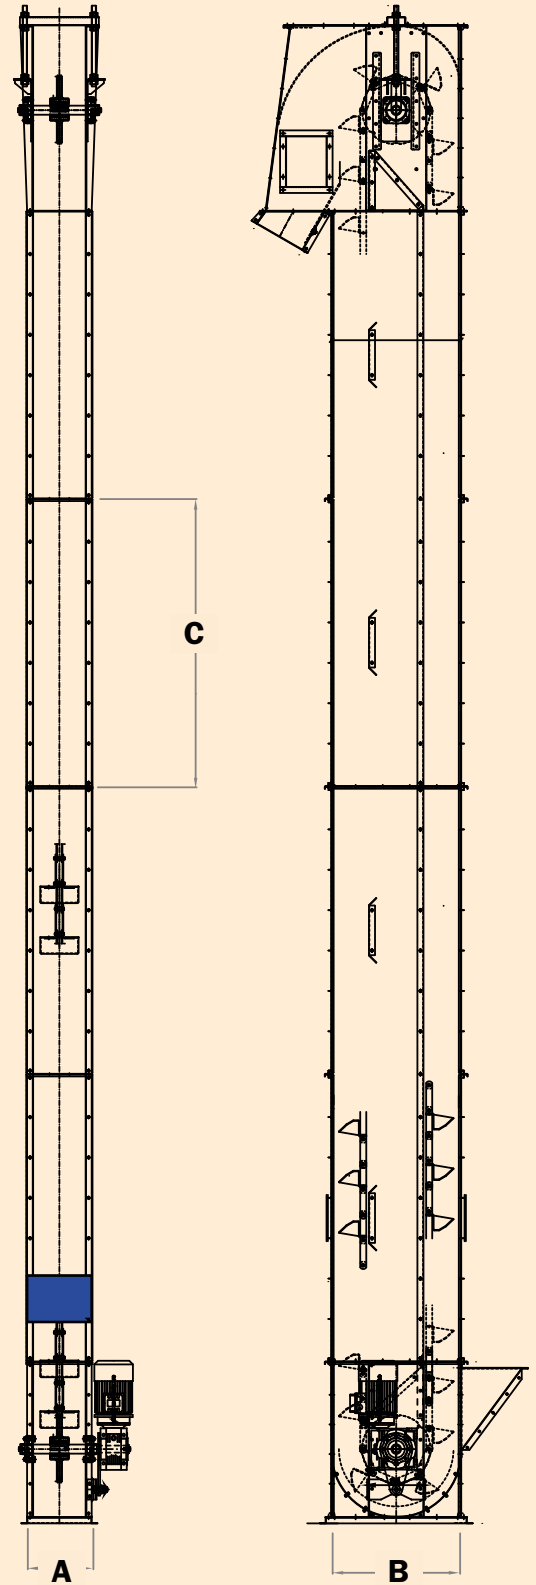

MODEL	A mm	B mm	C mm
E-260C	260	640	2850

NB: For specifications refer to the data sheet issued by Zanin F.lli srl



ZANIN F.lli s.r.l. Viale delle Industrie, 1 - 31032 Casale sul Sile (TV) - Italy
 Tel. +39 0422 785444 - Fax +39 0422 785805
 www.zanin-italia.com info@zanin-italia.com



© 2015 ZANIN F.lli - WARNING: DATA NOT BINDING, PLEASE REFER TO THE TECHNICAL DATA RELEASED DIRECTLY FROM ZANIN F.LLI

RESELLER