

# MESH FILTER



## USE


The mesh filter is mounted on the SA air cleaners and Minidry dryers.

## OPERATION

The dust in outlet from the cleaner or dryer are collected in the modular filtering chamber

## MANUFACTURING


The panels are in galvanised steel and manufactured in modular framework, the mesh is in AISI 304 stainless steel.

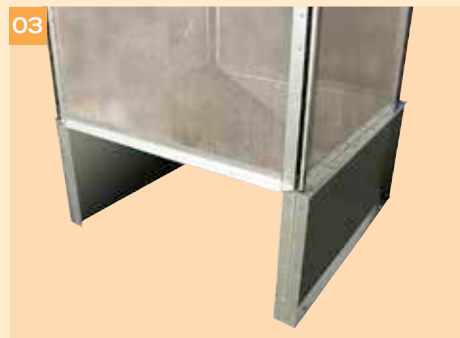

## DETAILS

01) Front view with air inlet  
02) Mesh detail

03) View of waste discharge outlet  
04) Air separation and filtering plant

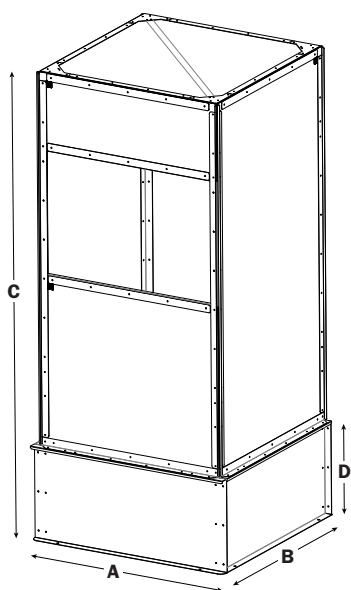

MODEL		FR-1	FR-2
<b>Weight</b>	<b>kg</b>	165	285
<b>Volume</b>	<b>m<sup>3</sup></b>	5,05	10,09
<b>A</b>	<b>mm</b>	1350	1350
<b>B</b>	<b>mm</b>	1250	2500
<b>C</b>	<b>mm</b>	2990	2990
<b>D</b>	<b>mm</b>	600	600



**ZANIN F.lli s.r.l.** Viale delle Industrie, 1 - 31032 Casale sul Sile (TV) - Italy  
Tel. +39 0422 785444 - Fax +39 0422 785805  
www.zanin-italia.com info@zanin-italia.com

© 2015 ZANIN F.lli - WARNING: DATA NOT BINDING, PLEASE REFER TO THE TECHNICAL DATA RELEASED DIRECTLY FROM ZANIN F.LLI

ZANIN-09-06-15



**RESELLER**