


PA-T

ASPIRATION PRE-CLEANER


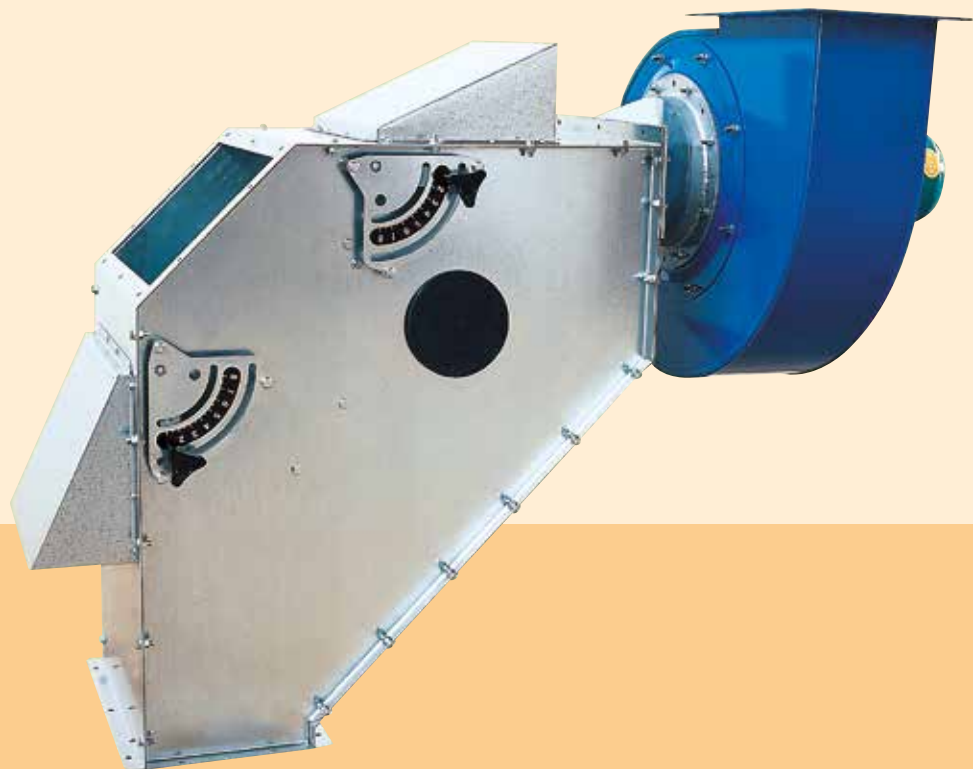


USE

This pre-cleaner with aspiration is designed to remove dust and light impurities from the grain. The machine is installed only for just cleaning the product of dust or light impurities and it's essential for cleaning cereals. This machine can be installed quickly and easily.

CONSTRUCTION

- Aspiration cowling with pressed galvanized panels
- Aspiration intake
- Airflow dampers

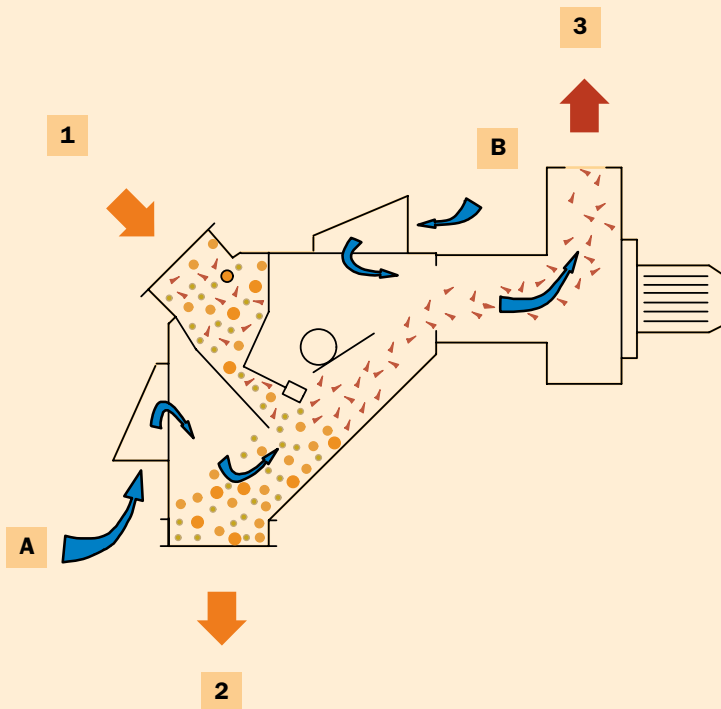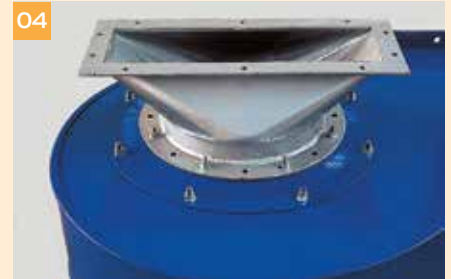

DETAILS

- 01 - Installation on by-pass outlet
- 02 - Installation on elevator
- 03 - Installation on screw
- 04 - Entry reduction cone

FUNCTION

The grain enters by gravity and is evenly distributed over the whole width. The grain descending as a curtain encounters a cross airflow, which takes up the lighter parts, which are then decanted by a cyclone or filter. The airflow through the product is regulated by the **valve A** and the total airflow is adjusted by “**false air**” **B**.

LEGEND

- 1) Product with impurities inlet
- 2) Clean product outlet
- 3) Product with fine impurities - dust outlet

OPTIONAL

- Inlet adapter bushing
- Outlet adapter bushing

MODEL	PA 20 T	PA 40 T	PA 60 T
Output - t/h**	25	40	60
Aspiration motor power - kW	1,1	1,5	3
Length - mm*	1600	1670	1847
Width - mm*	550	600	697
Height - mm*	940	940	1017
Weight empty - kg	85	150	215
Volume - m ³	0,8	1,1	1,3

* Overall dimensions
 ** Cleaning output with wheat specific weight 0.78 t/m³ - 14% RH - Impurities 2%



ZANIN F.lli s.r.l. Viale delle Industrie, 1 - 31032 Casale sul Sile (TV) - Italy
 Tel. +39 0422 785444 - Fax +39 0422 785805
 www.zanin-italia.com info@zanin-italia.com



©2015 ZANIN F.lli - WARNING: DATA IS NOT BINDING, PLEASE REFER TO THE TECHNICAL SHEET RELEASED DIRECTLY BY ZANIN F.LLI

RESELLER