

## DETAILS



### DETAILS

- 01) Drums detail
- 02) Brushes detail
- 03) Drum opening system with swing doors
- 04) PPR Mod. 1/9 with optional hoppers and optional support system


ZANIN-20-09-16



**ZANIN F.lli s.r.l.**  
Viale delle Industrie, 1  
31032 Casale sul Sile (TV) - Italy

T. +39 0422 785444  
F. +39 0422 785805

www.zanin-italia.com  
info@zanin-italia.com

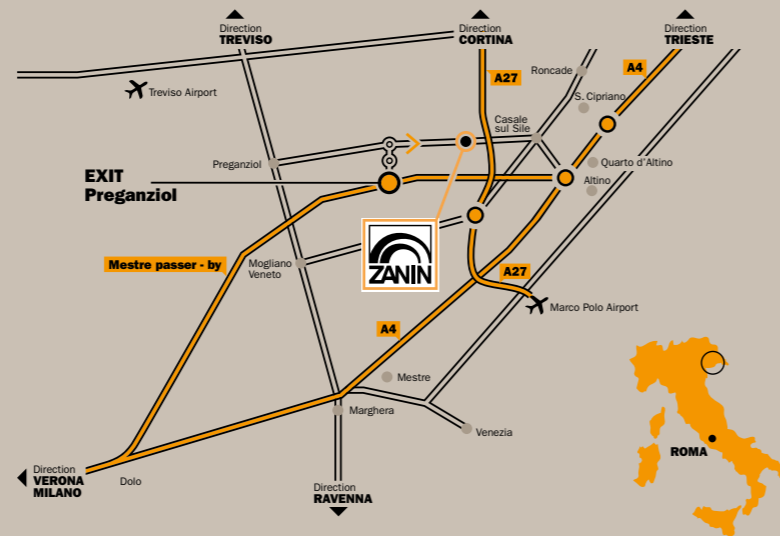

## PPR ROTARY PRE-CLEANER

©2015 ZANIN F.LLI - All contents (text, photos, graphic) present in this brochure are propriety of the ZANIN F.LLI company and are protected by the current law. The brochure cannot be published, reproduced, rewritten, distributed, and commercialized without explicit authorization. Brands, denominations and the mentioned companies inside of this brochure are propriety of respective proprietors and are protected by the current law in matter of brands, patents and / or copyright.

The company Zanin F.lli disclaims any liability for any inaccuracies in this depliant and reserves the right to make changes to the product as it deems appropriate at any time and without notice.

WARNING: INFORMATION IS NOT BINDING, PLEASE REFER TO THE TECHNICAL DOCUMENTATION RELEASED DIRECTLY BY ZANIN F.LLI

### RESELLER

# PPR

## ROTARY PRE-CLEANER


This pre-cleaner is designed for fast removal of light and rough impurities in the cereal. It is essential for the quality of the cereal that a pre-cleaner is installed at the dryer inlet. It homogenizes the product, preventing clogging and reducing energy consumption. The version with aspiration reduces the emission of dust into the atmosphere.



## FUNCTION

The product enters by gravity into a cylindrical rotating drum with changeable perforated screens. The good product passes through pre-set holes, while the rough impurities come out at the end of drum.

The choice of screen perforation size depends on the product, the moisture content and the type of reject to separate.

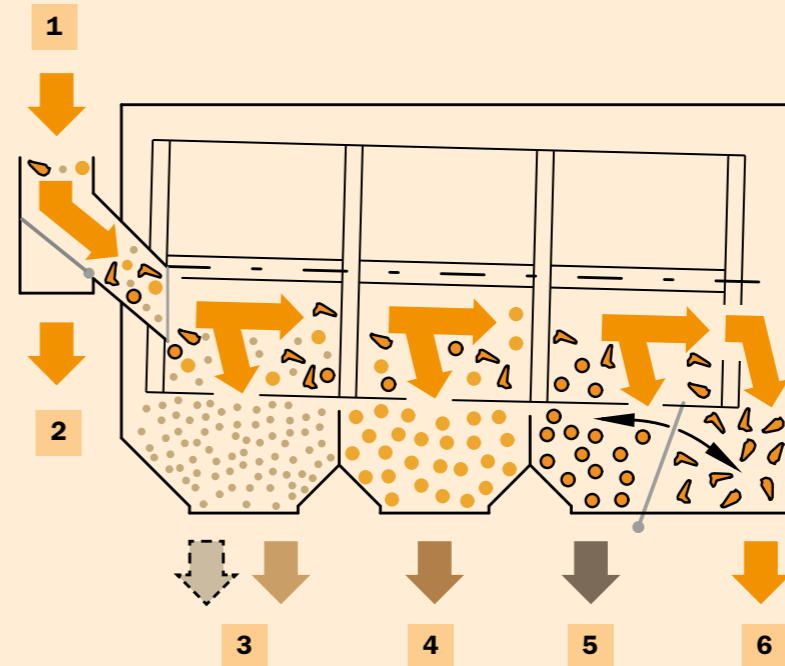

- 1) Product with impurities inlet
- 2) Product outlet (By-Pass)
- 3) Precleaned product outlet (optional thin impurities)
- 4) Clean product outlet
- 5) Clean product outlet
- 6) Heavy rejects outlet

## CONSTRUCTION

- Cowling and drum support uprights in pressed galvanised sheet
- Mobile lateral doors fitted with handle and lock
- Perforated carbon steel plate screens
- Manual drum inclination
- Nylon brushes for screen cleaning
- Fixed rotation speed
- Manually regulated conveyor for discharge of large impurities



01, 02, 03 - Installation examples

MODEL	PPR 2/6	PPR 3/6	PPR 4/6	PPR 1/9	PPR 3/9	PPR 4/9	PPR 3/12	PPR 4/12	PPR 5/12	PPR 3/16	PPR 4/16	PPR 5/16
Output - t/h**	20	30	40	50	75	100	140	180	230	225	300	375
Screen area - m <sup>2</sup>	2,5	3,75	5	3,5	7,5	10	10,5	13,5	16,75	13,5	18	22,5
N° of screens	2	3	4	1	3	4	3	4	5	3	4	5
Power - kW	0,75	1,1	1,1	1,1	2,2	3	3	4	5,5	4	5,5	7,5
Length - mm*	2192	2845	3492	2285	3810	4634	4290	5185	6115	4435	5340	6255
Width - mm*	800	800	800	1100	1100	1100	1400	1400	1400	2018	2018	2018
Height - mm*	1345	1345	1345	1255	1800	1800	2216	2216	2221	2441	2441	2441
Weight empty - kg	310	450	550	540	800	920	1280	1540	1750	1700	2675	3000
Volume - m <sup>3</sup>	2,3	3	3,7	3,15	7,5	9,2	13,3	16,1	19	22	26,5	31

\* Overall dimensions

\*\* Pre-Cleaning output with wheat, specific weight 0,78 t/m<sup>3</sup> - 14% RH - Impurities 2%

## OPTIONAL

- Variable drum rotation speed
- Wooden rollers for screen cleaning
- Motorised drum inclination

- Wearproof polyethylene sheet
- Motorised conveyor
- Control console