

# TELESCOPIC UNLOADER



## USE

Used for loading of tankers, open body lorries or rail cars efficiently and without spilling out of dust.

## OPERATION

The telescopic unloaders are suitable for continuous use and reach a maximum flow rate of 250 m<sup>3</sup>/h in the version with inlet of 300 mm and 400 m<sup>3</sup>/h with inlet 400 mm. The unloaders are equipped with a flange positioned in the upper part for the extraction of dust, to be connected to a remote filter.

In the lower part of the telescopic unloaders, a closing cone allows loading of tankers.

## MANUFACTURING


- RAL 5010 painting
- Neoprene flexible bellows covered by Hypalon® ascertains high resistance to weathering, abrasion and temperatures and make it extremely durable
- Reverse cone with integrated level indicator indicates when the tanker is full, raises the unloader and improves distribution of the material inside the tanker
- 2 lifting cables external to the flow of the material descend and raise the unloader without the obstruction and wear caused by the material in the products of the competitors



**MANUAL SYSTEM**



**ELECTRICAL SYSTEM**

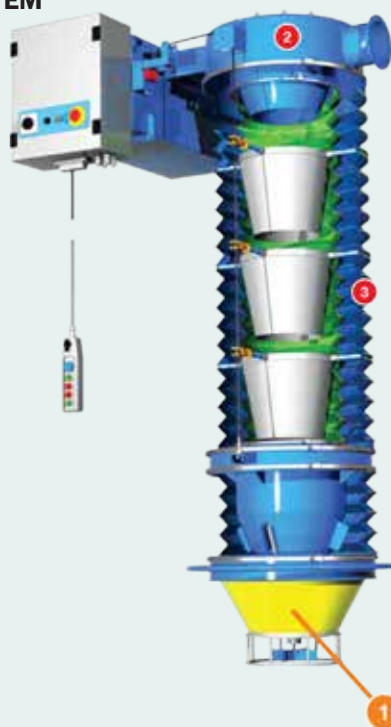

**CONE COATING**

The telescopic unloaders for tankers in the lower part are equipped with an outlet cone coated with SINT polymer to ascertain a perfect connection to the unloading outlet of the lorry. The cone can be equipped with a dustproof device.



MODEL	CAPACITY m <sup>3</sup>	MINIMUM STROKE mm	RETRACTED LENGHT mm	WEIGHT kg
ST 300	250	1000	880	200
ST-M 300	250	1000	880	200
ST 400	440	1000	1370	280

NB: The model ST-M is manual. Measures packaging ST-300 1200x300x1400 mm.  
Measures packaging ST-400 1200x300x2000 mm.

**OPTIONAL**

- Built-in anti-dust filter to reduce dust emissions during the unloading operation
- Double bellows with internal steel cones (optional)
- Neoprene/Hypalon® bellows (feeder as optional) or Kevlar®
- Control panel with remote control
- Available with capacitance level indicator, pallet or vibrating indicator
- Unloading vibrator
- Anti-waste device
- Abrasion resistant metal parts in contact with the product in hard steel
- Manual winch



**ZANIN F.lli s.r.l.** Viale delle Industrie, 1 - 31032 Casale sul Sile (TV) - Italy  
Tel. +39 0422 785444 - Fax +39 0422 785805  
www.zanin-italia.com info@zanin-italia.com



© 2015 ZANIN F.lli - WARNING: DATA NOT BINDING, PLEASE REFER TO THE TECHNICAL DATA RELEASED DIRECTLY FROM ZANIN F.LLI

ZANIN-09-06-15

**RESELLER**